

Optical Fiber Amplifier

# MSA Size Standard EDFA OFA-CCA Series



The LiComm standard EDFA OFA-CCA series is a full-functioning EDFA module with control circuitry packaged inside. It is designed for a single wavelength and narrow band fiber optic communications system in core networks, access networks, or CATV networks. The OFA-CCA series provides very stable output power up to 23dBm and noise figure of less than 5 dB in C-band over wide operating temperature range. Compact size (90 x 70 x 15 mm), combined with extremely low power consumption, allows the OFA-CCA series to be highly suitable for applications of power equalization or pre-emphasis in very crowded telecom and CATV transmission systems.

- Compact size (90 x 70 x 15 mm)
- Cooled 980 nm pump laser module
- Extremely low power consumption over wide operating temperature range
- EDFA module including electric control circuit
- High output power up to 23 dBm
- Wide input dynamic range
- Low noise figure
- APC (Automatic Power Control) or AGC (Automatic Gain Control)
- Control & monitor by RS232
- LVTTTL Alarm
- Single + 3.3 V power supply

## Applications

- Narrow band amplification in C-band
- CATV networks
- DWDM metro & long haul system
  - Power equalization
  - Pre-emphasis
- Signal loss compensation in switch matrix
- SONET/SDH system
- OADM access networks

## Optical Fiber Amplifier

# Standard EDFA


### Optical Characteristics

Parameter	Symbol	OFA-CCA-2301	Unit
Signal wavelength range	$\lambda$	1528 ~ 1563	nm
Input power	$P_{IN}$	-30~0	dBm
Saturation Output power <sup>(1)</sup>	$P_{OUT}$	23	dBm
Small signal gain <sup>(2)</sup>	G	40	dB
Noise figure	NF	Typ. 5	dB
Optical isolation	ISO	>30	dB
Return loss	RL	>40	dB
Polarization mode dispersion	PMD	<0.3	ps
Polarization dependent gain	PDG	<0.3	dB

(1) Input Power = 0 dBm

(2) Input Power = -30 dBm at 1545 nm

### Mechanical Dimension (90 X 70 X 15 mm)

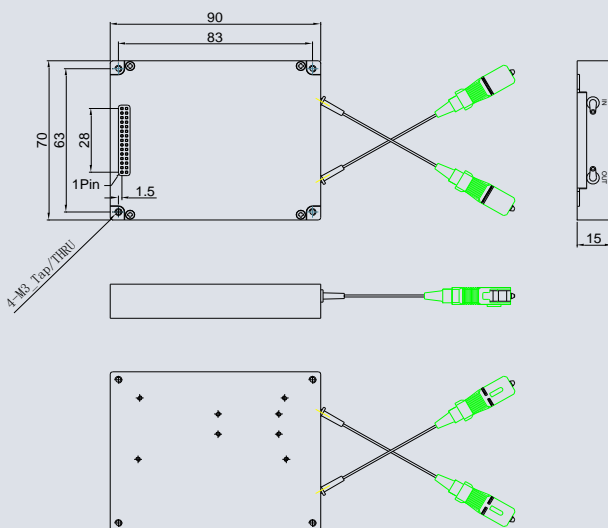

### Electric & Environmental Characteristics

Parameter	Typical Value
Power supply voltage	+3.3 V
Interface	RS232
Alarm	LVTTL
Operating temperature	-5 ~ 65 °C
Storage temperature	-40 ~ 85 °C
Storage humidity	5 ~ 90 % R.H
Power consumption*	5W

\*At maximum output power, at 25 °C

### Ordering Information

OFA - CCA - XX<sub>1</sub>XX<sub>2</sub>

XX<sub>1</sub> : Max. Output Power per Port (dBm)

XX<sub>2</sub> : The number of ports

ex) 2002: 20dBm output power/port x 2ports

- TCA - XX<sub>1</sub>XX<sub>2</sub>

XX<sub>1</sub> : Max. Output Power (dBm)

XX<sub>2</sub> : AP(APC), AG(AGC), AC(ACC)

ex) 23AP: 23dBm output power with APC control

LiComm Co., Ltd.

Address

109, Baekja-ro Idong-myeon, Cheoin-gu, Yongin-Si,  
Gyeonggi-Do, 17126, Korea

Tel: +82-31-323-1926, 1936 Fax: +82-31-323-2447

E-mail: sales@licomm.com Website : www.licomm.com