


Optical Fiber Amplifier Ultra Compact PICO-EDFA OFA-TCP Series

The world's smallest EDFA, pOA is a full-functioning EDFA module with the control circuitry packaged inside. It is designed for a single wavelength applications in fiber optic communications system in core networks, access networks, or CATV networks. The pOA, OFA-TCP series provides very stable output power up to in C-band over the wide operating temperature range. Ultra compact size (46 x 19 x 10 mm), combined with the extremely low power consumption, allows the OFA-TCP series to be highly suitable for applications of power equalization or pre-emphasis in densely packaged telecom systems, especially for densely integrated high speed transmitter or receiver cards and loss compensation for compact active optical module.

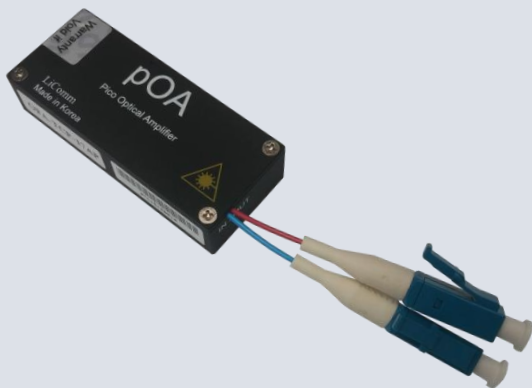

Features

- Ultra compact size (46 x 19 x 10 mm)
- EDFA module including micro process control circuit
- Uncooled 980 nm pump laser module
- Extremely low power consumption over wide operating temperature range
- High output power up to 17 dBm
- APC (Automatic Power Control) with FLS (Forced Laser Shutdown)
- Control & monitoring by I2C
- LVTTL Alarm
- Single + 3.3 V power supply

Applications

- Loss Compensation for active optical modules
- Optimized for integration into 100 Gbps coherent CFP & CPF2 modules
- Signal loss compensation in switch matrix
- Power equalization and Pre-emphasis Amplifier for DWDM Metro System
- 2.5G/10G/40G/100G Channel Amplifier
- SONET/SDH system
- OADM access networks
- CATV System

Optical Fiber Amplifier

pOA : PICO-Optical Amplifier





Optical Characteristics

Parameter	Symbol	OFA-TCP	Unit
Signal wavelength range	λ	1528 ~ 1563	nm
Input power	P_{IN}	-30~0	dBm
Saturation Output power ⁽¹⁾	P_{OUT}	17	dBm
Small signal gain ⁽²⁾	G	30	dB
Noise figure	NF	Typ. 6.0	dB
Optical isolation	ISO	>30	dB
Return loss	RL	>40	dB
Polarization mode dispersion	PMD	<0.5	ps
Polarization dependent gain	PDG	<0.5	dB

(1) Input Power = 0 dBm

(2) Input Power = -30 dBm at 1545 nm

Mechanical Dimension (WxLxH = 46 x 19 x 10[mm])

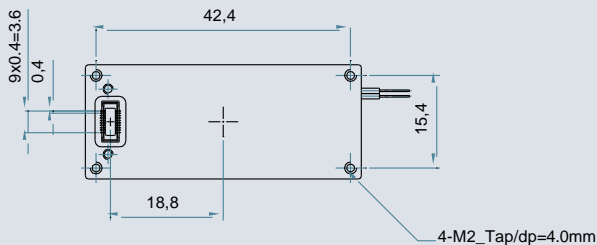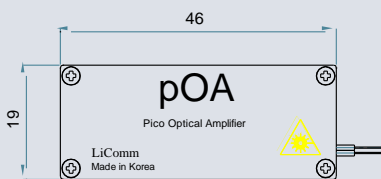

Electric & Environmental Characteristics

Parameter	Typical Value
Power supply voltage	+3.3 V
Interface	I2C
Alarm	LVTTL
Operating case temperature	0 ~ 70 °C
Storage temperature	- 40 ~ 85 °C
Storage humidity	5 ~ 85 % R.H
Power consumption*	2.5 W

* in normal input power and full temperature range

Control and Monitoring Functions

Parameter	Typical Value
Control Scheme	APC with FLS*
Monitor	OPM / LD-Bias / Case-Temp
Alarm	LOP / LD-Bias / Case-Temp

* FLS: Forced Laser Shutdown

Ordering Information

OFA - xCP - xx₁AP

T : Digital
 C : Analog (CATV)

XX₁ : Max. Output Power (dBm)

LiComm Co., Ltd.

Address

109, Baekja-ro Idong-myeon, Cheoin-gu, Yongin-Si,
 Gyeonggi-Do, 449-834, Korea

Tel: +82-31-323-1926, 1936 Fax: +82-31-323-2447

E-mail: sale@licomm.com Website : www.licomm.com